

VADDIO™ WALLVIEW™ HD-19 DVI/HDMI

High Definition PTZ Camera Featuring the Quick-Connect™ DVI/HDMI SR Interface



Black Version
Part Number 999-6946-000 (North America)
Part Number 999-6946-001 (International)



Arctic White Version
Part Number 999-6946-000AW (North America)
Part Number 999-6946-001AW (International)

Quick-Connect DVI/HDMI SR Interface

PN: 998-1105-018



Inside Front Cover - Blank

Overview:

The WallVIEW HD-19 HD PTZ camera and Quick-Connect DVI/HDMI EZCamera™ Cat-5e cabling system using HSDS™, is a system that allows for easy installation and integration of a camera system capable of simultaneous HD analog YPbPr and composite (CVBS). The HD-19 camera is built around a 1/3-type high-speed Exmor CMOS image sensor with a total of 1.3 Megapixels and a 19X optical zoom lens, making it the ideal choice for a wide range of high definition video applications including, 720p, 1080i or 1080p.

Because the camera module is built around a new, high speed CMOS image sensor with an increased pixel aperture size, high frame rate, high signal to noise while using the column-parallel A/D conversion method, the resolution, saturation and the sensitivity of the sensor is increased. The HD-19 achieves improved picture quality even in low light environments requiring a minimum illumination rated at an astonishing 0.7 LUX (F1.6 - 50IRE).



The WallVIEW HD-19 is available in Black and in Arctic White and is equipped with a slip-clutch mechanism for smooth pan/tilt operation and control. The HD-19 outputs HD video (YPbPr at 1080p/60/59.94/50/30/25, 1080i/59.94/50, 720p/59.94/50, 480i/30fps and 576i/25fps) and SD video (CVBS at 480i/NTSC or 576i/PAL) simultaneously.

The HD-19 is paired with the Quick-Connect DVI/HDMI SR Interface, which provides power to the camera and returns HSDS video from the camera up to 100' (30.5m) over a single Cat-5e cable. The Quick-Connect DVI/HDMI features extended control functions including Daisy Chain Control Emulation (DCCE™), which allows single control port codecs to control multiple HD-19 cameras, and IR forwarding in modulated and non-modulated formats for extending the reach of the IR remotes included with today's most popular videoconferencing systems. The WallVIEW HD-19 is an exceptional camera for a wide range of HD video applications such as houses of worship, corporate boardrooms, live events and distance-learning.

Intended Use:

Before operating the device, please read the entire manual thoroughly. The system was designed, built and tested for use indoors, and with the provided power supply and cabling. The use of a power supply other than the one provided or outdoor operation has not been tested and could damage the device and/or create a potentially unsafe operating condition.

Important Safeguards:

Read and understand all instructions before using. Do not operate any device if it has been dropped or damaged. In this case, a Vaddio technician must examine the product before operating. To reduce the risk of electric shock, do not immerse in water or other liquids and avoid extremely humid conditions.



Use only the power supply provided with the system. Use of any unauthorized power supply will void any and all warranties.



Please do not use "pass-thru" type RJ-45 connectors. These pass-thru type connectors do not work well for professional installations and can be the cause of intermittent connections which can result in the RS-232 control line failing and locking up, and/or compromising the HSDS™ signals. For best results please use standard RJ-45 connectors and test all cables for proper pin-outs prior to use and connection to Vaddio product.

Save These Instructions:

The information contained in this manual will help you install and operate your product. If these instructions are misplaced, Vaddio keeps copies of Specifications, Installation and User Guides and most pertinent product drawings for the Vaddio product line on the Vaddio website. These documents can be downloaded from www.vaddio.com free of charge.

UNPACKING:

Carefully remove the device and all of the parts from the packaging.

Unpack and identify the following parts for 999-6946-000:

- One (1) ClearVIEW HD-19 HD PTZ Camera
- One (1) Vaddio IR Remote Commander
- One (1) Quick-Connect DVI/HDMI SR Interface One (1) Laird Technologies 28A2432-0A2 Clamp-on Ferrite Cylinder (Wrap IR forwarding LED wires twice before screwing stripped wire ends to 3 conductor Molex Euro Jack)
- Two (2) Laird Technologies 28A0640-0A2 Clamp-on Ferrite (Clamp around 0.8" diameter DVI Cable at the Quick-Connect DVI end)
- One (1) Laird Technologies HFA163090-0A2 Clamp-on Ferrite (Clamp around 0.8" diameter shielded DVI Cable at the Monitor end)
- One (1) Vaddio PowerRite™ 24 VDC, 2.0 Amp Power Supply
- One (1) 998-1001-232 EZCamera Control Adapter (for control systems)
- One (1) 998-1002-232 EZCamera Control Adapter (for TANDBERG VC systems) One (1) 3-pos Phoenix type connector
- One (1) Thin Profile Wall Mount with Mounting Hardware
- One (1) AC Cord Set for North America
- Documentation

(Note: The 999-6946-001 Int'l Version includes the Euro and UK power cables)

ClearVIEW HD-19 PTZ Camera, Front View with Feature Call-outs:



1) Camera and Zoom Lens:

The 19X optical zoom lens is built around a 1/3-type high-speed CMOS image sensor with a total of 1.3 Megapixels for precise HD video image acquisition.

2) Red Tally Light:

A red tally light is illuminated when the camera receives a VISCA command from an external control system.

3) IR Sensors:

IR sensors are built into the front of the ClearVIEW HD-19 to receive IR signals from the IR remote control supplied with the camera as well as other 3rd party remotes for the IR forwarding feature.

4) Blue Power Light:

A Vaddio blue power light is illuminated when the camera is turned on.

Compatible Vaddio Switchers and Joystick Controllers:



ProductionVIEW™ HD MV
(999-5625-000)



AutoPresenter
(999-5675-000)



Precision Camera Controller
(999-5700-000)

ClearVIEW HD-19 PTZ Camera, Rear View with Feature Call-outs:



5) RS-232 IN & IR Out:

The RS-232 accepts modified VISCA protocol for camera control, as well as transmits IR signaling received by the IR receivers, which can be transmitted to third party devices.

6) Dip Switch Settings:

Settings for IR remote, baud rate, SD output format, and image flip can be configured on these switches. See page 5 for additional information on switch settings.

7) HD Video Select:

A rotary switch allows the user to choose the component HD output video resolution and format. See page 6 for additional information on switch settings.

8) 12 VDC Input:

Power input for the standard, ClearVIEW HD-19 camera power supply.

9) YPbPr Output:

Component HD video is fed through the DB-15 connector. YPbPr and Composite signals are simultaneous. This is an HD camera and the SD signals are down converted and are really not the sweet spot of this camera.

9) Composite Video (CVBS) Output:

The CVBS output feeds out SD video signals and is configurable with the dip switches to choose between 480i/NTSC or 576i/PAL in 4:3 formats. Squeeze and letterbox modes are also available (see dipswitches 6&7).

11) EZ Power/Video Port:

This RJ-45 connector is only used with the Quick-Connect SR Interface and the Quick- Connect DVI-D/HDMI SR Interface to supply power and return HSDS video from the camera.

12) Slot for Optional Cards:

Optional slot cards can be plugged into the ClearVIEW HD-19 camera (the HD-SDI Slot Card and the EZIM CCU Slot Card are available separately).

Quick-Connect DVI/HDMI - SR Interface I/O Description



- 1) **Blue LED Power Indicator.**
- 2) **24 VDC Power Port:** Coax Power Connector, 5.5mm OD x 2.5mm ID, Positive Center.
- 3) **Recessed Color Space Conversion Switch:** Toggles between HDMI YCbCr and sRGB (RGBHV) color space. Change the color space to accommodate either YCbCr or RGBHV monitors.
- 4) **RS-232 Control Input** (from joystick controller, codec or control system).
- 5) **To Camera:** RS-232 Control to & from Camera and IR signals returned from the camera.
- 6) **Daisy Chain Control Port:** Daisy Chain Control Emulation (DCCE) output to next Quick-Connect DVI/HDMI SR Interface (does not function with the AutoTrak System).
- 7) **IR Output Port:** Non-modulated (for hard connections) and Modulated for use with IR emitters.
- 8) **DVI-D Output:** High Definition Multimedia Interface (HDMI) Transmitter, HDMI (v 1.3 with deep color) and DVI v 1.0 Compliant - use Recessed Color Space Conversion Switch to toggle between HDMI YCbCr and sRGB (RGBHV) color spaces to suit your monitors
- 9) **YPbPr Output:** Analog Component Video Output on DE-15F (HD-15F) Connector, Resolutions up to 1080p/60 with monitor support.
- 10) **EZCamera Power & HD Video Port:** Supplies power to camera and returns HD video from the camera via Cat-5e. Maximum distance on the CAT-5e cable is 100' (30.5 m).

Installation Basics:

The WallVIEW HD-19 product was designed for installation on a vertical wall surface with Cat-5e cable connectivity for Power, Video and Control signaling (two Cat-5e cables are required). Installation is simplified in that no custom 8-Pin mini-din cables or expensive coax plenum cables are needed and no power outlets are required near the camera bracket. All cabling is routed to the head-end using Cat-5e cables.

Before Installing:

- Locate the camera mounting location paying close attention to camera viewing angles, lighting conditions, possible line of site obstructions, and checking for in-wall obstructions where the camera is to be mounted. Pick a mounting location that will optimize the performance of the camera.
- The Thin Profile Wall Mount for the WallVIEW HD-19 can be mounted directly to a 2-gang wall box or can be mounted to the drywall using four dry wall anchors.

RS-232 Cabling:

For RS-232, use a standard Cat-5e cable and RJ-45 connectors (568B termination) from the RS-232 port on the back of a Vaddio camera controller or switcher. If the camera is connected to a third-party control system (such as AMX or Crestron), a DB-9 to RJ-45 control adapter cable is supplied. **Use of pass-thru type RJ-45 connectors is highly discouraged.** The Vaddio Cat-5e wiring standard uses pins 7 and 8 on both the video and the control Cat-5e cables. The pass-through connectors have proven to provide insufficient connectivity for these important signals. They are "ok" for voice and data, but not for video and control.

Videoconferencing Codecs and RS-232:

Depending on the codec and RS-232 port used, special DB-9 to RJ-45 adapters may sometimes be required. Refer to Vaddio's price list or website for Tech Notes on the WallVIEW HD-19 page on specific diagrams for wiring the camera to videoconferencing codecs. Any special adapters and configuration information will be noted.

Remember to always power up the cameras before booting up the codec.

First Time Set-up with the HD-19:

The ClearVIEW HD-19 was designed to be exceptionally easy to use and operate. There is documentation at the back of the manual for pin-outs for all of the connectors on the ClearVIEW HD-19 camera.

Step 1: Using the HD Video Select Rotary Switch and Camera Settings Dip Switch on the back of the camera, set up the camera's output resolution and functional preferences. There is a label on the bottom of the camera that identifies the choices.



Label on the Bottom of HD-19

DIP SWITCH SETTINGS										HD VIDEO SELECT			
IR 1 1 & 2 UP	IR OUT OFF	9600 bps	SD NTSC	SD 4:3 6 & 7 UP	IMAGE FLIP OFF	TEST BARS OFF	10 OFF			0	720p/59.94	8	576i/25
☐	☐	☐	☐	☐	☐	☐	☐			1	1080i/59.94	9	---
☐	☐	☐	☐	☐	☐	☐	☐			2	1080p/59.94	A	---
☐	☐	☐	☐	☐	☐	☐	☐			3	1080p/60	B	---
☐	☐	☐	☐	☐	☐	☐	☐			4	720p/50	C	---
☐	☐	☐	☐	☐	☐	☐	☐			5	1080i/50	D	---
☐	☐	☐	☐	☐	☐	☐	☐			6	1080p/50	E	1080p/30
☐	☐	☐	☐	☐	☐	☐	☐			7	480i/29.97	F	1080p/25
1	2	3	4	5	6	7	8	9	10				


- Set the HD output resolution for the camera with the Rotary Switch.
- Set the IR frequency of the camera if it is to respond to the IR remote control.
- If using RS-232 for control, leave the IR OUT OFF (SW3) and choose 9600bps
- If using the IR forwarding feature, turn the IR OUT ON (SW3).
- If inverting the camera, turn the IMAGE FLIP ON (SW8).

Dip Switch Settings:


- **IR 1 & 2:** The IR remote has the capability of operating up to three different PTZ cameras from one remote. Use the selector buttons at the top of the IR remote to select the frequency.
- **IR Out 3:** The IR output is sent out on the RS-232 RJ-45 jack on the back of the camera. Turning on the IR output will allow IR signals to be transmitted over the CAT-5 cable to the head end. When using RS-232 control or Vaddio CCU controllers (also via RS-232), turn the IR OUT to OFF.
- **Baud Rate 4:** The options for baud rate are either 9600 bps or 38,400 bps. Default is 9600 bps.
- **SD Format 5:** Choose between NTSC or PAL formats
- **SD Configurations 6 & 7:** SD video can be set to standard 4:3, squeeze mode or letterbox mode.
- **Image Flip 8:** To invert the HD-19, turn the IMAGE FLIP ON (switch down).
- **Test Bars 9:** Turning on the non-standard test bars will override the camera video output. These non-standard test bars are 75% IRE.
- **Switch 10:** Leave up - or in the OFF position

System Connectivity Example 1:

Basic system connectivity of a Vaddio WallVIEW™ DVI/HDMI HD-19 and Quick-Connect DVI/HDMI SR Interface with Vaddio ProductionVIEW™ Precision Camera Controller and PreVIEW HD Monitors.

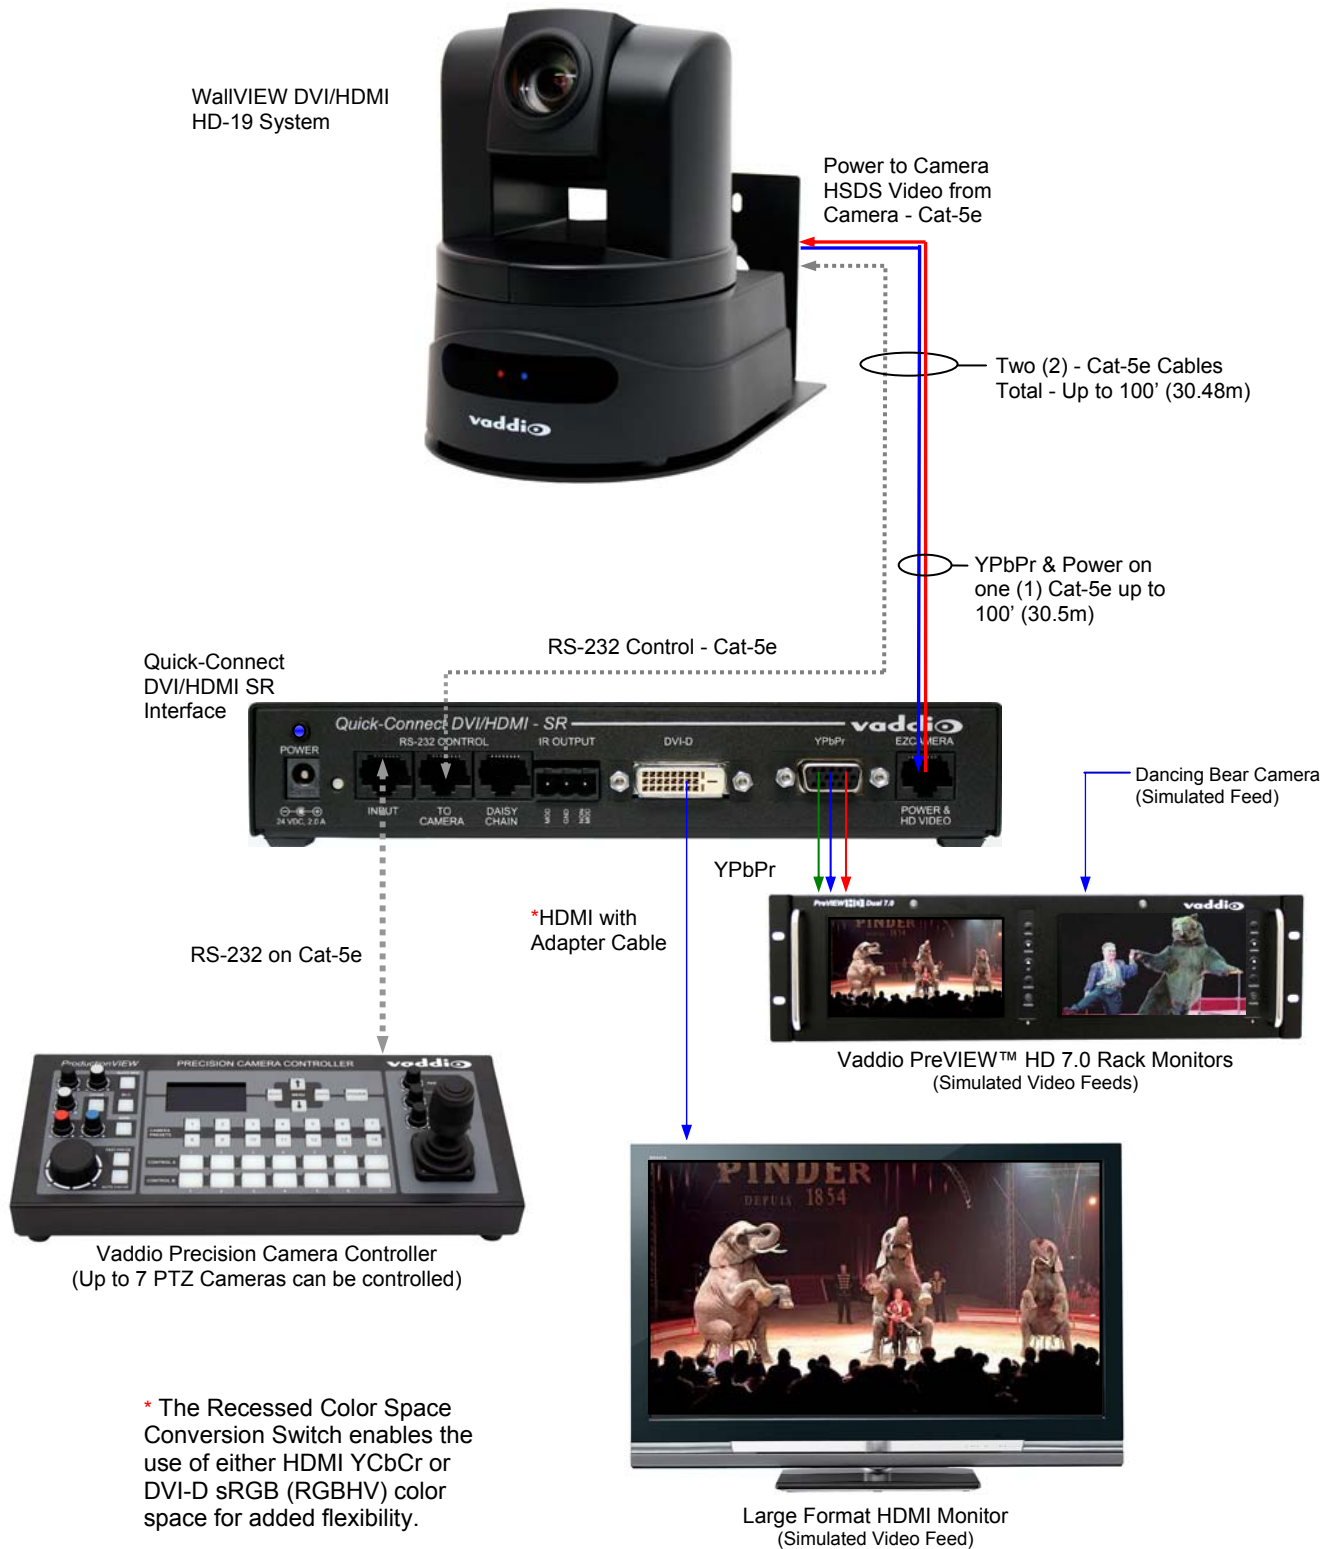

System Connectivity Example 2: System connectivity of two (2) Vaddio HD-19 cameras and two (2) Quick-Connect DVI/HDMI SR Interfaces configured with single control port codec and Daisy Chain Control Emulation (DCCE).

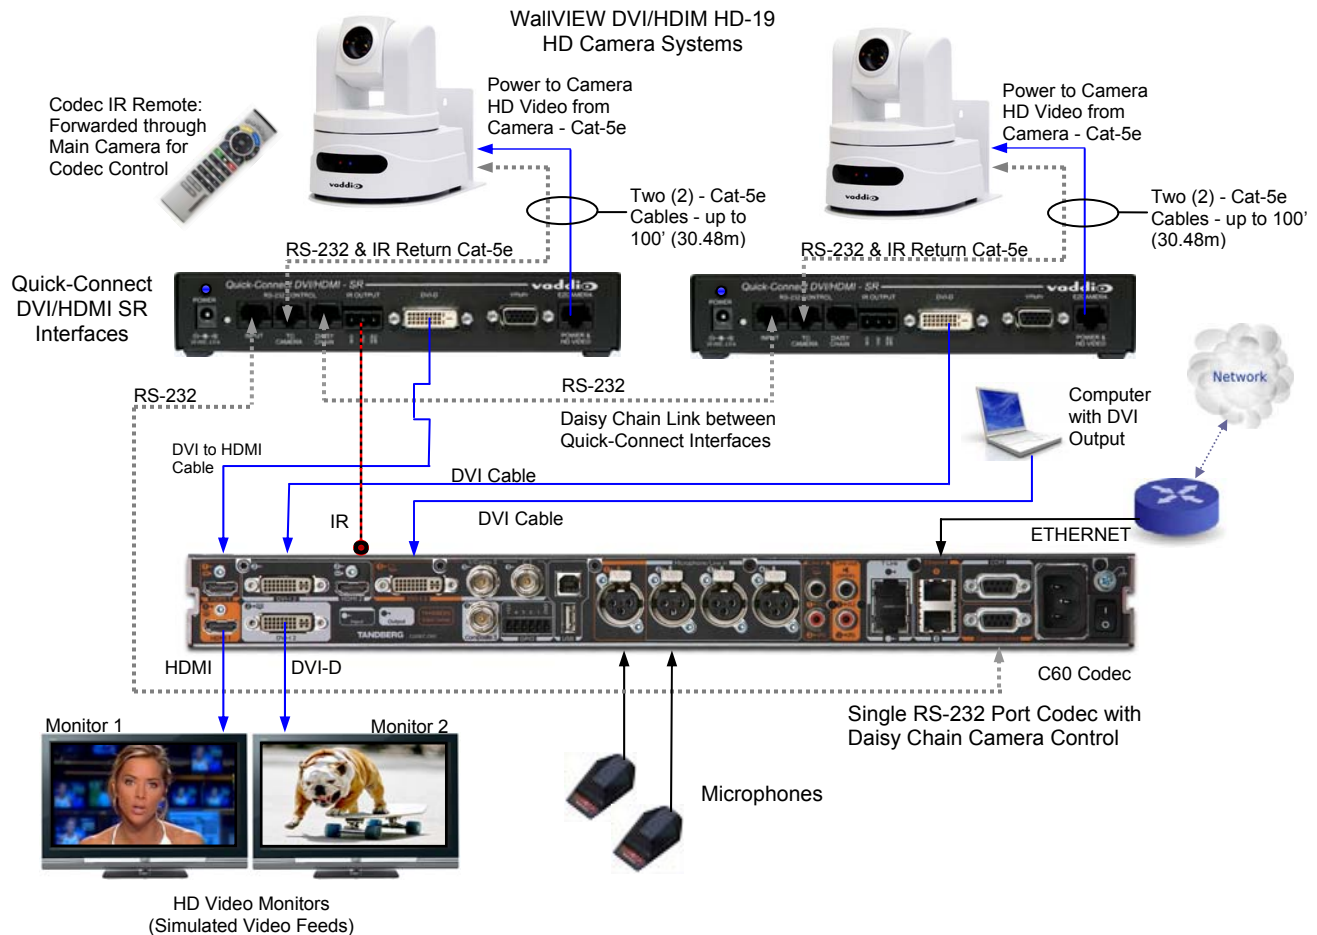

BASIC INSTALLATION INSTRUCTIONS

Step 1: After determining the optimum location of the camera system, route the two (2) Cat-5e cables from the camera to the Quick-Connect DVI-HDMI SR Interface located at the head-end. The two Cat-5e cables should feed-through the oval slot located on the rear flange of the wall mount. The bracket can be mounted on a 2-gang wall box or to the drywall with wall anchors. The mounting holes are slotted and are 90° opposing to provide easy leveling. Mark the cables Power/Video and RS-232.



Step 2: Follow the sample wiring diagrams for connecting the Cat-5e cables to the camera and Quick-Connect DVI/HDMI SR Interface. Additional diagrams are available on our website for installation with a variety of videoconferencing codecs, using the RS-232 I/O connectors for IR signaling.



NOTE: Check all Cat-5e cables for in advance of the final connection. Plugging the system in wrong may cause damage to the camera system and void the warranty.

Step 3: Place the camera onto the camera mount and plug in the Cat-5e cable marked Power/Video into the EZ POWER HD VIDEO RJ-45 on the camera. Plug the Cat-5e marked RS-232 into the RS-232 / IR OUT jack. Use the 1/4"-20 screws provided to secure the camera to the mount. NOTE: Set up the camera first (see page 7).

Step 4: At the head end, plug the Cat-5e cable labeled Power/Video into the EZCamera POWER & HD VIDEO RJ-45 jack on the Quick-Connect DVI/HDMI Interface. Plug the Cat-5e marked RS-232 into the RS-232 CONTROL - TO CAMERA RJ-45.

Step 5: Plug your RS-232 controller (Vaddio's ProductionVIEW HD, Precision Camera Controller, ControlVIEW XHD, AutoPresenter, etc...) into the RS-232 CONTROL INPUT. If you are using a 3rd party controller (Crestron®, or AMX®) use the provided 9-pin to RJ-45 control adapter and then a Cat-5e cable to plug this RS-232 controller into this port.

Step 6: Connect the HD Video Outputs (DVI or HDMI with adapter cable - or - analog HD YPbPr video) into a display device or video console. Please make sure that the video console or the display device is set up to receive the HD camera resolution that was chosen with the rotary switch on page 6. Most monitors are automatic, however all consoles will need set-up prior to termination.

Step 7: Connect the Vaddio 24 VDC, 2.0A power supply to the POWER Connector on the Quick-Connect and plug the power adapter into an AC outlet. Power will travel down the Power/Video Cat-5e cable to the camera. The camera will "Home" to a centered position, return HSDS video back to the Quick-Connect and is ready for control from the IR remote or RS-232 camera controller. **Boot Order: Always turn the cameras on first, then the controller or codec.**

Daisy Chain Configurations/Installation Instructions: In some cases, daisy chain control situations just can't be avoided. Because of this, Vaddio added "Daisy Chain Control Emulation" or DCCE™ to the Quick-Connect DVI/HDMI - SR Interface in order to use the HD-19 camera in these situations. See Connectivity Example 2 (previous page) where the codec requires daisy chain control wiring.

- 1) For daisy chain control, first complete steps above, since all the cabling between the camera and the Quick-Connect DVI/HDMI Interface is the same.
- 2) Instead of running a cable from the 1st camera to the 2nd camera, run a Cat-5e patch cable from the 1st Quick-Connect DVI/HDMI Interface's RS-232 CONTROL DAISY CHAIN RJ-45 jack, to the 2nd Quick-Connect DVI-HDMI SR Interface's RS-232 CONTROL INPUT RJ-45 jack.
- 3) Within the modified VISCA® protocol that the codec and the HD-19 use, the 1st in the chain will set up as Camera #1, the second will set up as Camera #2 in the chain, allowing the codec IR remote to select which camera it will switch to and which to control.
- 4) In the case of TANDBERG codecs, use the IR Modulated output of the Quick-Connect and a Xantech IR emitter (282D or 283D) and attach the emitter to the front panel of the codec (in front of the IR receiver).
- 5) Polycom codecs with IR receivers can connect the IR feed-through the same way as the TANDBERG, but do not use daisy chain control. Several Polycom codecs can also be connected directly with the non-modulated signal to the codec's IR signal input port.

Basic Daisy Chain Connectivity:



General Specifications:

WallVIEW DVI/HDMI HD-19	
Part Numbers	WallVIEW HD-19 (North America) P/N: 999-6946-000 (Black), 999-6946-000AW (Arctic White) WallVIEW HD-19 (International) P/N: 999-6946-001(Black), 999-6946-001AW (Arctic White)
Vaddio HD-19	
Image Sensor	1/3-Type Exmor High-speed, Progressive Scan CMOS Sensor with 1.3 Megapixels
Video Output Resolutions	HD: 1080p/60/59.94/50/30/25, 1080i/59.94/50, 720p/59.94/50 SD: 480i/NTSC & 576i/PAL (Crop, Squeeze or Letterbox mode) Color: The Recessed Color Space Conversion Switch enables the use of either HDMI YCbCr or DVI-D sRGB (RGBHV) color space for added flexibility.
Lens/ Focal Length	19X Optical Zoom, F=4.5mm wide to 85mm tele end (F1.6-F2.9), Min. Focus Distance 1.0m
Horizontal Viewing Angle	58.1° Wide End to 3.2° Tele End - 16:9 Format
Video S/N Ratio	>52 dB
Minimum Illumination	0.7 LUX (F1.6, 50IRE)
Serial Control Protocol	RS-232 (Modified VISCA)
Pan Range	Pan: +170 degrees to -170 degrees, Tilt: +90 degrees to -30 degrees, Invertible for Ceiling Mount
Preset Positions	16 (internal), 6 recalled via IR Remote
Tally Light	Available through RS-232 Control
Connectors	12 VDC Power Input: EIAJ-04 Coaxial Power Connector - HD Video Outputs: YPbPr on DE-15 (D-Sub 15-pin HD) - SD Video Output: BNC Connector - RS-232/IR Out: RJ-45 Jack (RS-232 Communication and IR Out (with Quick-Connect -SR Interfaces) - EZ Power HD Video: RJ-45 Jack, for use with Quick-Connect SR Interface or Quick-Connect DVI/HDMI SR Interface. Supplies power to the camera and returns HD video from the camera to the Quick-Connect - SR Systems.
HD Video Select	16-Position Rotary Switch: Used to set HD Video Resolution Output
Camera Settings	10-Position Dip Switch: Settings for IR Select, Baud Rate 9600, Image Flip, SD LB and SQ, Test Bars OSD (On Screen Display) for fine tuning
Accessories	EZIM HD-SDI Slot Card PN# 998-6900-007 EZIM CCU Slot Card PN# 999-6900-006 - For Use with Quick-Connect CCU Only
Operating Temperature	32° to 104° F (0° to 40° C) / 20% to 80% Relative Humidity
Dimensions (H x W x D)	8.5" (215.9mm) H x 6.75" (171.45mm) W x 7.7" (195.58mm) D
Weight	5.79 lbs. (2.625635463kg.)
Quick-Connect DVI/HDMI SR (Short Range) Interface	
Connectors	- Power Connector: 5.5mm OD, 2.5mm ID coaxial connector - RJ-45: Four (4) Control IN, Control OUT, Daisy Chain OUT, EZCamera Power Video Port - Video Output: DE-15 connector for HD Analog Component (Y,PB,PR) video only (No SD Support) - IR Output: Transmits modulated or non-modulated IR signals received from the HD-19 IR receiver - Video Outputs: DVI-D (Female - Single Link) or HDMI with adapter cable (using the Recessed Color Space Conversion Switch) , DE-15F (High Density D-Sub 15-Pin F) for HD YPbPr
Cat-5e Cable Distance	Up to 100' (30.5m)
Power Supply	24 VDC, 2 Amp
Dimensions / Weight	1.6" (40.64mm) H x 8" (203.2mm) W x 6.751" (171.45mm) D, ½-Rack Size / 1.21 lbs. (0.548846804 kg)
Accessory Options	1-RU Rack Mount Panel for two (2) units (side by side): P/N: 998-6000-003 1m (3.3') DVI-D Male to HDMI Male P/N: 440-5643-001 3m (10') DVI-D Male to HDMI Male P/N: 440-5643-003
Thin Profile Wall Mount HD-19	
Materials	12-Gauge CRS with Black Powder Coat Paint
Dimensions	5.125" (130.175)mm H x 6.75" (171.45mm) W x 10" (254mm) D
Weight	Approx. 2.4 lbs. (1.08862176kg)

Compliance and CE Declaration of Conformity - ClearVIEW HD-19

Compliance testing was performed to the following regulations:

- | | |
|--|---------|
| • FCC Part 15, Subpart B | Class A |
| • ICES-003, Issue 4: 2004 | Class A |
| • EN 55022 A: 2006 + A1: 2007(CISPR 22:2005/A1:2005) | Class A |
| • AS/NZS CISPR 22: 2009 + A1: 2010 | Class A |
| • VCCI V-3/2010.04 | Class A |
| • EMC Directive 2004/108/EC | Class A |



FCC Part 15 Compliance

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15, Subpart B, of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference including interference that may cause undesired operation of the device. Changes or modifications not expressly approved by Vaddio can affect emission compliance and could void the user's authority to operate this equipment.



ICES-003 Compliance

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.



European Compliance

This product has been evaluated for Electromagnetic Compatibility under the EMC Directive for Emissions and Immunity and meets the requirements for a Class A digital device. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Standard(s) To Which Conformity Is Declared:

EMC Directive 2004/108/EC

EN 55024: 1998 + Amendments A1: 2001 + A2: 2003

- | | |
|---|---|
| • EN 61000-4-2: 1995 + Amendments A1: 1998 + A2: 2001 | Immunity |
| • EN 61000-4-3: 2006 + A1: 2008 | Electrostatic Discharge |
| • EN 61000-4-4: 2004 + Corrigendum 2006 | Radiated Immunity |
| • EN 61000-4-5: 2006 | Electrical Fast Transients |
| • EN 61000-4-6: 2009 | Surge Immunity |
| • EN 61000-4-8: 2010 | Conducted Immunity |
| • EN 61000-4-11: Second Edition: 2004 | Power Frequency Magnetic Field |
| | Voltage Dips, Interrupts and Fluctuations |

Compliance and CE Declaration of Conformity - Quick-Connect DVI/HDMI SR Interface

Compliance testing was performed to the following regulations:

- **FCC Part 15, Subpart B**
- **ICES-003, Issue 4: 2004**
- **European Standard EN 55022 A: 2006 + A1: 2007(CISPR 22:2005/A1:2005)**
- **EMC Directive 2004/108/EC**

Class A
Class A
Class A
Class A



FCC Part 15 Compliance

- This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15, Subpart B, of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.
- Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference including interference that may cause undesired operation of the device.
- Changes or modifications not expressly approved by Vaddio can affect emission compliance and could void the user's authority to operate this equipment.



Industry
Canada

Industrie
Canada

ICES-003 Compliance

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.



European Compliance

This product has been evaluated for Electromagnetic Compatibility under the EMC Directive for Emissions and Immunity and meets the requirements for a Class A digital device. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Ferrite cylinders are included in order to the Quick-Connect DVI/HDMI SR Interface to strictly comply with the European Community EMC Directives compliance. Use these ferrites to ensure the elimination of possible EMI interference from cell phones and AC motors.

Standard(s) To Which Conformity Is Declared:

EMC Directive 2004/108/EC

EN 55022 A: 2006 + A1 2007 (CISPR 22:2005/A1:2005) Conducted and Radiated Emissions

EN 55024: 1998 + Amendments A1: 2001 + A2: 2003 - Electromagnetic Compatibility - Immunity

EN 61000-4-2 Electrostatic Discharge

EN 61000-4-3 Radiated Immunity

EN 61000-4-4 Electrical Fast Transients

EN 61000-4-5 Surge Immunity

EN 61000-4-6 Conducted Immunity

EN 61000-4-8 Power Frequency Magnetic Field

EN 61000-4-11 Voltage Dips, Interrupts and Fluctuations

WARRANTY INFORMATION

(See Vaddio Warranty Policies posted on vaddio.com for complete details):

Hardware* Warranty: One year limited warranty on all parts. Vaddio warrants this product against defects in materials and workmanship for a period of one year from the day of purchase from Vaddio. If Vaddio receives notice of such defects during the warranty period, they will, at their option, repair or replace products that prove to be defective.

Exclusions: The above warranty shall not apply to defects resulting from: improper or inadequate maintenance by the customer, customer applied software or interfacing, unauthorized modifications or misuse, operation outside the normal environmental specifications for the product, use of the incorrect power supply, improper extension of the power supply cable or improper site operation and maintenance.

Vaddio Customer Service: Vaddio will test, repair, or replace the product or products without charge if the unit is under warranty and is found to be defective. If the product is out of warranty, Vaddio will test then repair the product or products. The cost of parts and labor charge will be estimated by a technician and confirmed by the customer prior to repair. All components must be returned for testing as a complete unit. Vaddio will not accept responsibility for shipment after it has left the premises.

Vaddio Technical Support: Vaddio technicians will determine and discuss with the customer the criteria for repair costs and/or replacement. Vaddio Technical Support can be contacted through one of the following resources: e-mail support at support@vaddio.com or online at www.vaddio.com.

Return Material Authorization (RMA) Number: Before returning a product for repair or replacement, request an RMA from Vaddio's technical support. Provide a technician with a return phone number, e-mail address, shipping address, and product serial numbers and describe the reason for repairs or returns as well as the date of purchase and proof of purchase. Include your assigned RMA number in all correspondence with Vaddio. Write your assigned RMA number on the shipping label of the box when returning the product. All returns are subject to a restocking fee without exception (see warranty policies at vaddio.com).

Voided Warranty: The warranty does not apply if the original serial number has been removed or if the product has been disassembled or damaged through misuse, accident, modifications, or unauthorized repair. Cutting the power supply cable on the secondary side (low voltage side) to extend the power to the device (camera or controller) voids the warranty for that device.

Shipping and Handling: Vaddio will not pay for inbound shipping transportation or insurance charges or accept any responsibility for laws and ordinances from inbound transit. Vaddio will pay for outbound shipping, transportation, and insurance charges for all items under warranty but will not assume responsibility for loss and/or damage by the outbound freight carrier. If the return shipment appears damaged, retain the original boxes and packing material for inspection by the carrier. Contact your carrier immediately.

Products Not Under Warranty: Payment arrangements are required before outbound shipment for all out of warranty products.

*Vaddio manufactures its hardware products from parts and components that are new or equivalent to new in accordance with industry standard practices.

Other General Information:

Care and Cleaning

Do not attempt to take this product apart at any time. There are no user-serviceable components inside.

- Do not spill liquids or liquid type substances onto the device.
- Keep this device away from food or liquid.
- For smears or smudges on the devices, wipe with a clean, soft cloth.
- Do not use any abrasive pads or caustic chemicals at any time on any Vaddio equipment.


Operating and Storage Conditions:

Do not store or operate the device under the following conditions:

- Temperatures above 40°C (104°F) or temperatures below 0°C (32°F)
- High humidity, condensing or wet environments
- In inclement weather
- Dusty environments
- In a swimming pool or the beach
- Dry environments with an excess of static discharge
- In a space/time vortex
- Under severe vibration

Appendix 1: YPbPr Video Pin-Out for the HD-19 Camera and Quick-Connect SR Interface

Pin	YPbPr
1	Pr
2	Y
3	Pb
4	-
5	-
6	Pr GND
7	Y GND
8	Pb GND
9	-
10	-
11	-
12	-
13	-
14	-
15	-

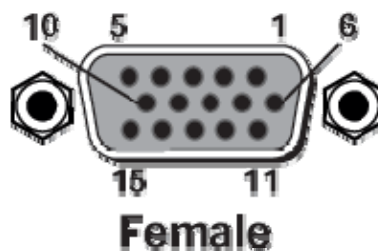


EZCamera Power & HD Video RJ-45 Connector Pin-outs




The EZCamera Power and HD Video RJ-45 Connector is for use with either the **Quick-Connect SR Interface** or the **Quick-Connect DVI/HDMI SR Interface ONLY** (568B Wiring Standard). The video signals are differential (HSDS™) and can only be received by the interfaces above.

Pin	YPbPr
1	Power+
2	Power-
3	Y+
4	PB+
5	PB GND
6	Y GND
7	PR+
8	PR-




Appendix 2: ClearVIEW HD-19 Dimensions

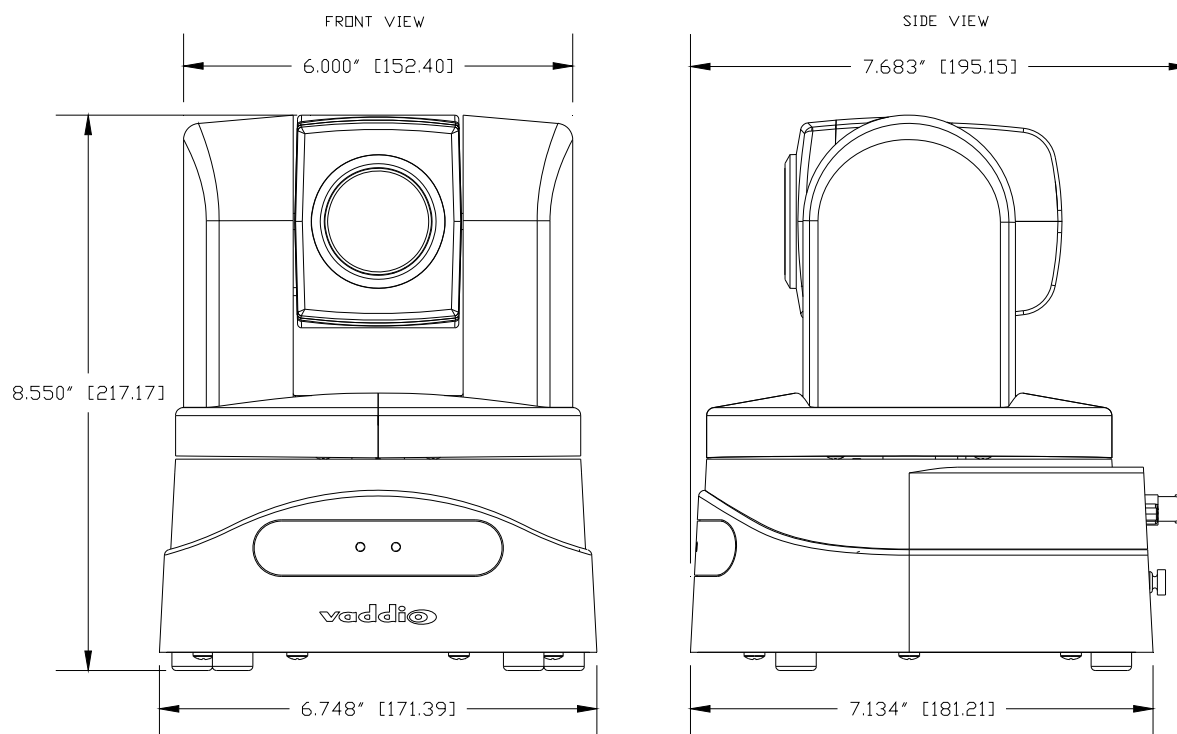

Appendix 3: Communication Specification

Communication Speed: 9600 bps (default)
 Start bit: 1
 Stop bit: 1
 Data bits: 8
 Parity: None
 No Flow control



Pin #	RJ-45 RS-232 and IR Out Pins
1)	Unused
2)	Unused
3)	Unused
4)	IR Output (Diff Signal to Quick-Connect SR)
5)	IR Ground (Diff Signal to Quick-Connect SR)
6)	GND (GND of IR Short Range - Pin 3)
7)	RXD (from TXD of control source)
8)	TXD (to RXD of control source)

NOTE: The Vaddio ClearVIEW HD-19 Control Protocol is similar, but not identical to the Sony® VISCA™ command set in order to be compatible with several popular control devices. Not all VISCA commands are supported and there are many HD-19 specific commands in the following Command and Inquiry Lists.

HD-19 Command List (1/2)

Command Set	Command	Command Packet	Comments
Address Set	Broadcast	88 30 01 FF	Address Set (Daisy chain)
IF_Clear	Broadcast	88 01 00 01 FF	IF Clear
Command Cancel		8x 2p FF	p:socket number(1,2)
CAM_Power	On Off(Standby)	8x 01 04 00 02 FF 8x 01 04 00 03 FF	Power On/Off
CAM_Zoom	Stop Tele(Standard) Wide(Standard) Tele(Variable) Wide(Variable) Direct Direct(Variable)	8x 01 04 07 00 FF 8x 01 04 07 02 FF 8x 01 04 07 03 FF 8x 01 04 07 2p FF 8x 01 04 07 3p FF 8x 01 04 47 0p 0q 0r 0s FF 8x 01 7E 01 4A 0v 0p 0q 0r 0s FF	pqrs: Zoom Position* v:(Speed) 0-7
CAM_Focus	Stop Far(Standard) Near(Standard) Far(Variable) Near(Variable) AutoFocus ManualFocus Auto/Manual Direct	8x 01 04 08 00 FF 8x 01 04 08 02 FF 8x 01 04 08 03 FF 8x 01 04 08 2p FF 8x 01 04 08 3p FF 8x 01 04 38 02 FF 8x 01 04 38 03 FF 8x 01 04 38 10 FF 8x 01 04 48 0p 0q 0r 0s FF	pqrs: Focus position*
CAM_WB	Auto Manual One Push WB	8x 01 04 35 00 FF 8x 01 04 35 05 FF 8x 01 04 35 03 FF	
CAM_RGain	Reset Up Down Direct	8x 01 04 03 00 FF 8x 01 04 03 02 FF 8x 01 04 03 03 FF 8x 01 04 43 00 00 0p 0q FF	pq:00-ff
CAM_BGain	Reset Up Down Direct	8x 01 04 04 00 FF 8x 01 04 04 02 FF 8x 01 04 04 03 FF 8x 01 04 44 00 00 0p 0q FF	pq:00-ff
CAM_AE	Full Auto Manual Shutter Priority Iris Priority	8x 01 04 39 00 FF 8x 01 04 39 03 FF 8x 01 04 39 0A FF 8x 01 04 39 0B FF	Auto Exposure Mode Manual Control Mode Shutter Priority Mode Exposure Priority Mode (default)
CAM_Iris	Reset Up Down Direct	8x 01 04 0B 00 FF 8x 01 04 0B 02 FF 8x 01 04 0B 03 FF 8x 01 04 4B 00 00 0p 0q FF	pq(0x00-0x11)
CAM_Gain	Reset Up Down Direct	8x 01 04 0C 00 FF 8x 01 04 0C 02 FF 8x 01 04 0C 03 FF 8x 01 04 4C 00 00 0p 0q FF	pq(0x00-0x24)
CAM_Bright	Reset Up Down Direct	8x 01 04 0D 00 FF 8x 01 04 0D 02 FF 8x 01 04 0D 03 FF 8x 01 04 4D 00 00 0p 0q FF	pq(0x01-0x64)

HD-19 Command List (2/2)

Command Set	Command	Command Packet	Comments
CAM_Backlight	On	8x 01 04 33 02 FF	
	Off	8x 01 04 33 03 FF	
CAM_Aperture	Reset	8x 01 04 02 00 FF	
	Up	8x 01 04 02 02 FF	
	Down	8x 01 04 02 03 FF	
	Direct	8x 01 04 42 00 00 0p 0q FF	pq(0x00-0x1F)
CAM_Memory	Reset	8x 01 04 3F 00 0p FF	
	Set	8x 01 04 3F 01 0p FF	p:Memory No(=0-0xe)
	Recall	8x01 04 3F 02 0p FF	pqrs:0x0000 – 0xFFFF
CAM_IDWrite		8x 01 04 22 0p 0q 0r 0s FF	
IR_Receive	On	8x 01 06 08 02 FF	
	Off	8x 01 06 08 03 FF	
	On/Off	8x 01 06 08 10 FF	IR forwarding/Local IR
Pan-tiltDrive	Up	8x 01 06 01 VV WW 03 01 FF	WW: Pan Speed (0x01-0x18)
	Down	8x 01 06 01 VV WW 03 02 FF	VV:Tilt Speed(0x01-0x14)
	Left	8x 01 06 01 VV WW 01 03 FF	
	Right	8x 01 06 01 VV WW 02 03 FF	
	UpLeft	8x 01 06 01 VV WW 01 01 FF	
	UpRight	8x 01 06 01 VV WW 02 01 FF	
	DownLeft	8x 01 06 01 VV WW 01 02 FF	
	DownRight	8x 01 06 01 VV WW 02 02 FF	
	Stop	8x 01 06 01 VV WW 03 03 FF	
	Absolute Position	81 01 06 02 VV WW 0Y 0Y 0Y 0Y 0Z 0Z 0Z 0Z FF 0Y 0Y 0Y 0Y 0Z 0Z 0Z 0Z FF	YYYY: Pan Position** ZZZZ: Tilt Position**
	Home	8x 01 06 04 FF	
	Reset	81 01 06 05 FF	
Tally	On	8x 01 7E 01 0A 00 02 FF	
	Off	8x 01 7E 01 0A 00 03 FF	
Preset Pan Speed	Pan/Tilt/Zoom Speed	81 01 7E 01 0B WW SS ZZ FF	WW: Pan Speed (0x01-0x18) SS:Tilt Speed(0x01-0x14) ZZ:Zoom Speed(0-7);
Motor Config	Hard Motor Stops	8x 01 7E 01 70 00 00 FF	
	Soft Motor Stops	8x 01 7E 01 70 00 01 FF	
BLK.Enhance	Pedestal	No Support	No Support
GMA.Enhance	Gamma	8x 01 7E 54 00 00 0p 0q FF	pq: Gamma (0x00-0x10)
CRM.Enhance	Chroma	8x 01 7E 55 00 00 0p 0q FF	pq: Chroma (0x00-0x64)
KNE.Enhance	Knee	No Support	No Support
DIS.Enhance	Digital Image	8x 01 7E 57 02 FF	On
	Stabilizer	8x 01 7E 57 03 FF	Off
SNR.Enhance	Super Noise	8x 01 7E 58 02 FF	On
	Reduction	8x 01 7E 58 03 FF	Off
AGC.Enhance	AGC Mode	8x 01 7E 59 00 FF	Off
		8x 01 7E 59 01 FF	Low
		8x 01 7E 59 02 FF	Medium
		8x 01 7E 59 03 FF	High
CAM_Shutter	Reset	8x 01 04 0A 00 FF	
	Up	8x 01 04 0A 02 FF	
	Down	8x 01 04 0A 03 FF	
	Direct	8x 01 04 4A 00 00 0p 0q FF	pq(0x00-0x23)
CAM_ExpComp	On	8x 01 04 3E 02 FF	AutoExposure Off
	Off	8x 01 04 3E 03 FF	AutoExposure On
	Reset	8x 01 04 0E 00 FF	
	Up	8x 01 04 0E02 FF	
	Down	8x 01 04 0E 03 FF	
	Direct	8x 01 04 4E 00 00 0p 0q FF	Pq: 0x00-0x24
CAM_ICR Cut Filter	ICR On	8x 01 04 01 02 FF	ICR On - Cut Filter Out
	ICR Off	8x 01 04 01 03 FF	ICR Off - Cut Filter In

*Zoom and Focus Data:

CAM_Zoom: Range(0x000–0x6B3)

CAM_Focus: Range (0x000-0xC000) dependent on Zoom Position

**Additional Information:

Pan Range: 8044 – 7FBC (-32,700 to +32,700)

Tilt Range: E891 – 4C2B (-5,999 to +19,499)

Actual Pan/Tilt ranges defined in Inquiry list

HD-19 Inquiry List (1/1)

Inquiry Command	Command	Response Packet	Comments
CAM_PowerInq	8x 09 04 00 FF	y0 50 02 FF y0 50 03 FF	On Off(Standby)
CAM_ZoomPosInq	8x 09 04 47 FF	y0 50 0p 0q 0r 0s FF	pqr: 0-0x6B3
CAM_FocusPosInq	8x 09 04 48 FF	y0 50 0p 0q 0r 0s FF	pqrs: Focus Position
CAM_WBModelInq	81 09 04 35 FF	y0 50 00 FF y0 50 05 FF y0 50 03 FF	Auto Manual One Push WB
CAM_RGain	8x 09 04 43 FF	y0 50 00 00 0p 0q FF	pq:000-Off
CAM_BGain	8x 09 04 44 FF	y0 50 00 00 0p 0q FF	pq:000-Off
CAM_Iris	8x 09 04 4B FF	y0 50 00 00 0p 0q FF	pq(0x00-0x11)
CAM_Gain	8x 09 04 4C FF	y0 50 00 00 0p 0q FF	pq(0x00-0x24)
CAM_Bright	8x 01 04 4D FF	y0 50 00 00 0p 0q FF	pq(0x01-0x64)
CAM_BacklightModelInq	8x 09 04 33 FF	y0 50 02 FF y0 50 03 FF	On Off
CAM_ApertureInq	8x 09 04 42 FF	y0 50 00 00 0p 0q FF	Pq:x00-0x1F
CAM_MemoryInq	8x 09 04 3F FF	y0 50 0p FF	p:Preset 0-0xf
CAM_IDInq	8x 09 04 3F FF	y0 50 0p 0q 0r 0s FF	pqrs:0x0000 – 0xFFFF
CAM_ReceiveInq	8x 09 06 08 FF	y0 50 02 FF y0 50 03 FF	On Off
Pan-TiltMaxSpeedInq	8x 09 06 11 FF	y0 50 pp qq FF	pp:Pan 0x01-0x18 qq:Tilt 0x01-0x14
Pan-tiltPositionInq	8x 09 06 12 FF	FF y0 50 0p 0p 0p 0p 0q 0q 0q 0q FF	pppp: Pan 0x8044-0x7FB2 qqqq: Tilt 0xE890-0x4C2C
TallyInq	8x 09 7E 01 0A FF	y0 50 02 FF y0 50 03 FF	On Off
PresetSpeedInq	8x 09 7E 01 0B FF	y0 50 pp qq rr FF	pp:Pan 0x01-0x18 qq:Tilt 0x01-0x14 rr:Zoom 0x00-0x07
Motor Config	8x 09 7E 01 70 FF	y0 50 00 FF y0 50 01 FF	Hard Motor Stops Soft Motor Stops
BLK.Enhance	No support	No Support	Pedestal
GMA.Enhance	8x 09 7E 54 FF	y0 50 00 00 0p 0q FF	pq: Gamma (0x00-0x10)
CRM.Enhance	8x 09 7E 55 FF	y0 50 00 00 0p 0q FF	pq: Chroma (0x00-0x64)
KNE.Enhance	No support	No Support	Knee
DIS.Enhance	8x 09 7E 57 FF	y0 50 02 FF y0 50 03 FF	On Off
SNR.Enhance	8x 09 7E 58 FF	y0 50 02 FF y0 50 03 FF	On Off
AGC.Enhance	8x 09 7e 59 FF	y0 50 00 FF y0 50 01 FF y0 50 02 FF y0 50 03 FF y0 50 04 FF	Off Low Medium High Manual AGC
CAM_AEModelInq	8x 09 04 39 FF	y0 50 00 FF y0 50 03 FF y0 50 0A FF y0 50 0B FF	Auto Exposure Mode Manual Control Mode Shutter Priority Mode Exposure Priority Mode
CAM_ShutterPosInq	8x 09 04 4A FF	y0 50 00 00 0p 0q FF	pq: 0x0-0x23
CAM_ExpCompModelInq	8x 09 04 3E FF	y0 50 02 FF y0 50 03 FF	On - AE Mode Off Off – AE Mode On
CAM_ExpCompPosInq	8x 09 04 4E FF	y0 50 00 00 0p 0q FF	pq: ExpComp Pos
CAM_ICRModelInq	8x 09 04 01 FF	y0 50 02 FF y0 50 03 FF	On - ICR filter Out Off – ICR filter In

Appendix 3 (continued):**Iris Position:**

Index	F-Stop (Iris Position)
0x11	F1.6
0x10	F2.0
0x0F	F2.4
0x0E	F2.8
0x0D	F3.4
0x0C	F4.0
0x0B	F4.8
0x0A	F5.6
0x09	F6.8
0x08	F8.0
0x07	F9.6
0x06	F11.0
0x05	F14.0
0x04	F16.0
0x03	F19.0
0x02	F22.0
0x01	F28.0
0x00	Close

Gamma Position:

Index	Gamma value
0x10	1.00
0xF	0.95
0xE	0.90
0xD	0.85
0xC	0.80
0xB	0.75
0xA	0.70
0x9	0.65
0x8	0.60
0x7	0.55
0x6	0.50
0x5	0.45
0x4	0.40
0x3	0.35 (Default)
0x2	0.30
0x1	0.25
0x0	0.20

Shutter Position(Speed):

Index	Shutter (Speed)
0x23	1/30000
0x22	1/10000
0x21	1/5000
0x20	1/2500
0x1F	1/1500
0x1E	1/1000
0x1D	1/700
0x1C	1/600
0x1B	1/500
0x1A	1/480
0x19	1/360
0x18	1/300
0x17	1/250
0x16	1/240
0x15	1/200
0x14	1/180
0x13	1/150
0x12	1/120
0x11	1/100
0x10	1/60
0x0F	1/50
0x0E	1/30
0x0D	x2
0x0C	x4
0x0B	x6
0x0A	x8
0x09	x10
0x08	x12
0x07	x14
0x06	x16
0x05	x20
0x04	x24
0x03	x32
0x02	x40
0x01	x48
0x00	x60



9433 Science Center Drive, Minneapolis, MN 55428
Toll Free: 800-572-2011 ▪ Phone: 763-971-4400 ▪ FAX: 763-971-4464
www.vaddio.com